


油圧用管フランジ SHA、SHB(350K)

炭素鋼

ステンレス鋼

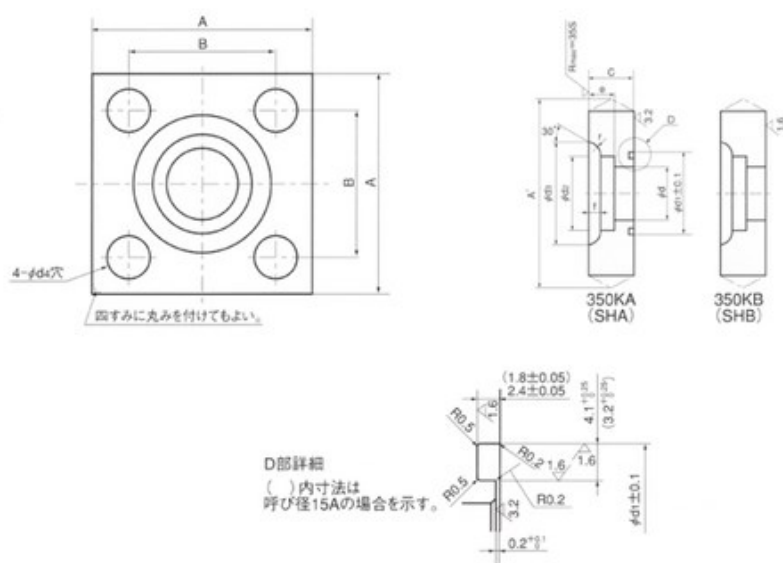

※炭素鋼，ステンレス鋼共通

mm														
A呼称	A	A'	B	C	d	d1	d2	e	d3	d4	f	r	ボルト	Oリング
15A	68.0	73.0	45.0	28.0	12.3	24.0	22.2	12.0	37.5	11.0	4.0	5.0	M10	P20
20A	82.0	87.0	55.0	30.0	16.2	30.0	27.7	12.0	43.5	13.5	5.0	5.0	M12	G25
25A	95.0	101.0	65.0	35.0	21.2	35.0	34.5	14.0	53.0	17.5	5.5	6.0	M16	G30
32A	100.0	106.0	70.0	35.0	23.3	40.0	43.2	18.0	63.0	17.5	7.0	6.0	M16	G35
40A	105.0	112.0	75.0	42.0	28.2	45.0	49.1	20.0	70.0	17.5	8.0	6.0	M16	G40
50A	132.0	140.0	92.0	50.0	38.3	55.0	61.1	25.0	84.0	22.0	9.0	6.0	M20	G50
65A	160.0	170.0	112.0	60.0	48.3	65.0	77.1	30.0	105.0	26.0	12.0	7.0	M24	G60
80A	190.0	202.0	130.0	68.0	58.7	75.0	90.0	30.0	120.0	33.0	13.5	7.0	M30	G70

A' は鍛造による場合の抜けこう配を含む最大寸法を示す。