
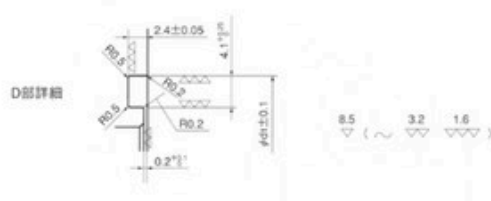



油圧用管フランジ LSA(21Mpa(210K))

炭素鋼

ステンレス鋼

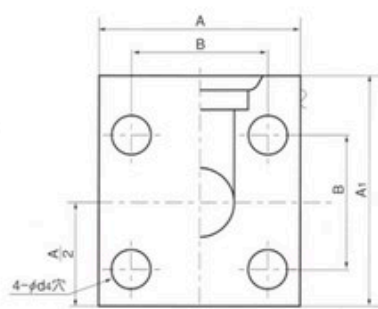

※炭素鋼，ステンレス鋼共通

mm													
A呼称	A	A1	B	C	h	d	d1	d2	e	d3	d4	f	r
15A	54.0	63.0	36.0	40.0	20.0	16.0	30.0	22.2	11.0	32.0	11.0	3.5	5.0
20A	58.0	70.0	40.0	45.0	22.5	20.0	35.0	27.7	12.0	38.0	11.0	4.0	5.0
25A	68.0	82.0	48.0	50.0	25.0	25.0	40.0	34.5	14.0	45.0	13.0	4.0	5.0
32A	76.0	92.0	56.0	63.0	31.5	31.5	45.0	43.2	16.0	56.0	13.0	6.0	5.0
40A	92.0	110.0	65.0	71.0	35.5	37.5	55.0	49.1	18.0	63.0	18.0	7.0	5.0
50A	100.0	125.0	73.0	85.0	42.5	47.5	65.0	61.1	20.0	75.0	18.0	7.0	5.0
65A	128.0	150.0	92.0	106.0	53.0	60.0	80.0	77.1	22.0	95.0	22.0	9.5	6.0
80A	140.0	170.0	103.0	118.0	59.0	71.0	90.0	90.0	25.0	108.0	24.0	11.0	6.0

A呼称	ボルト	Oリング
15A	M10	G25
20A	M10	G30
25A	M12	G35
32A	M12	G40
40A	M16	G50
50A	M16	G60
65A	M20	G75
80A	M22	G85